

1106729

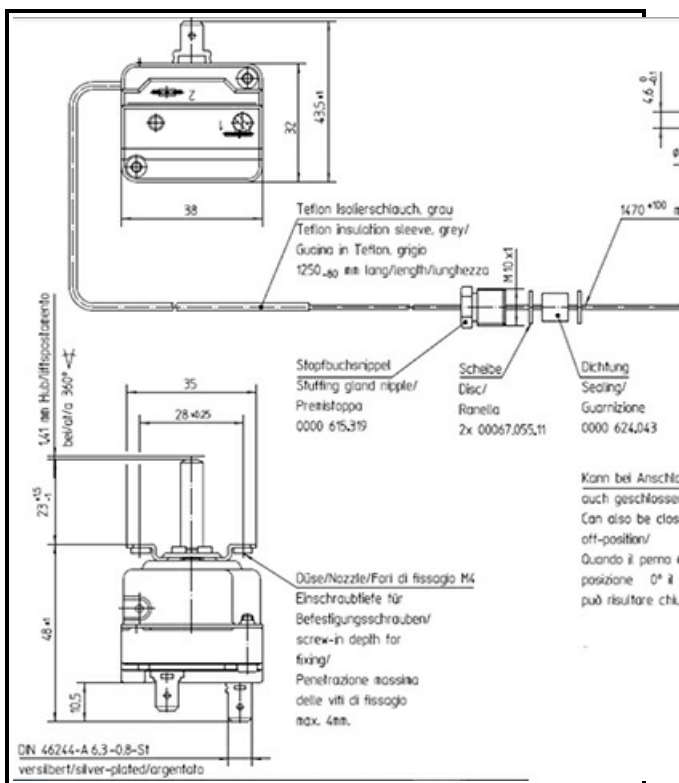
THERMOSTAT 105-190° 230V SINGLE PHASE- SENSOR Ø 4X235mm - CAPILLARY 1500mm

Date: 15-11-2024



**ORIGINAL
OSP
SPARE PARTS**

Technical data

	<table border="1"> <tr> <td>MONOPHASE</td> <td>MONOFASE/MONOPHASE</td> </tr> <tr> <td>NUMBER OF POLES</td> <td>POLI/POLES=2</td> </tr> <tr> <td>MINIMUM TEMPERATURE °</td> <td>T min=105°</td> </tr> <tr> <td>MAXIMUM TEMPERATURE °</td> <td>T max=190°</td> </tr> <tr> <td>WIRE mm</td> <td>L=1500mm</td> </tr> <tr> <td>PROBE DIAMETER MM</td> <td>B=4mm</td> </tr> <tr> <td>PROBE LENGTH MM</td> <td>A=235mm</td> </tr> <tr> <td>STUFFING BOX MM</td> <td>M10X1</td> </tr> <tr> <td>SHAFT mm</td> <td>ALBERO/SHAFT=4X6mm</td> </tr> </table>	MONOPHASE	MONOFASE/MONOPHASE	NUMBER OF POLES	POLI/POLES=2	MINIMUM TEMPERATURE °	T min=105°	MAXIMUM TEMPERATURE °	T max=190°	WIRE mm	L=1500mm	PROBE DIAMETER MM	B=4mm	PROBE LENGTH MM	A=235mm	STUFFING BOX MM	M10X1	SHAFT mm	ALBERO/SHAFT=4X6mm
MONOPHASE	MONOFASE/MONOPHASE																		
NUMBER OF POLES	POLI/POLES=2																		
MINIMUM TEMPERATURE °	T min=105°																		
MAXIMUM TEMPERATURE °	T max=190°																		
WIRE mm	L=1500mm																		
PROBE DIAMETER MM	B=4mm																		
PROBE LENGTH MM	A=235mm																		
STUFFING BOX MM	M10X1																		
SHAFT mm	ALBERO/SHAFT=4X6mm																		

Teflon Isolierschlauch, grau
 Teflon insulation sleeve, grey/
 Guaina in Teflon, grigio
 1250,80 mm lang/length/lunghezza

Stopfbuchsippel
 Stuffing gland nipple/
 Prestistoppa
 0000 615,319

Scheibe
 Disc/
 Ranello
 2x 00067,055,11

Dichtung
 Sealing/
 Guarnizione
 0000 624,043

1470 +100 mm
 lang/length/lunghezza

F-2047

Kann bei Anschlag links
 auch geschlossen sein/
 Can also be closed in
 off-position/
 Quando il perno è in
 posizione 0° il contatto
 può risultare chiuso

Schaltschema/
 Wiring diagram/
 Schema elettrico

DN 46244-A 6.3-0.8-St
 versilbert/silver-plated/argento

Manufacturer code

ELFRAMO SPA

ELFRAMO SPA

E.G.O. ELEKTRO GERATE AG

E.G.O. ELEKTRO GERATE AG